

EXTRUDED FLEXIBLE JOINT SEALANT




FLEXIBLE JOINT SEALANT




JOINT DETAILS

N.T.S.




SECTION C-C

N.T.S.

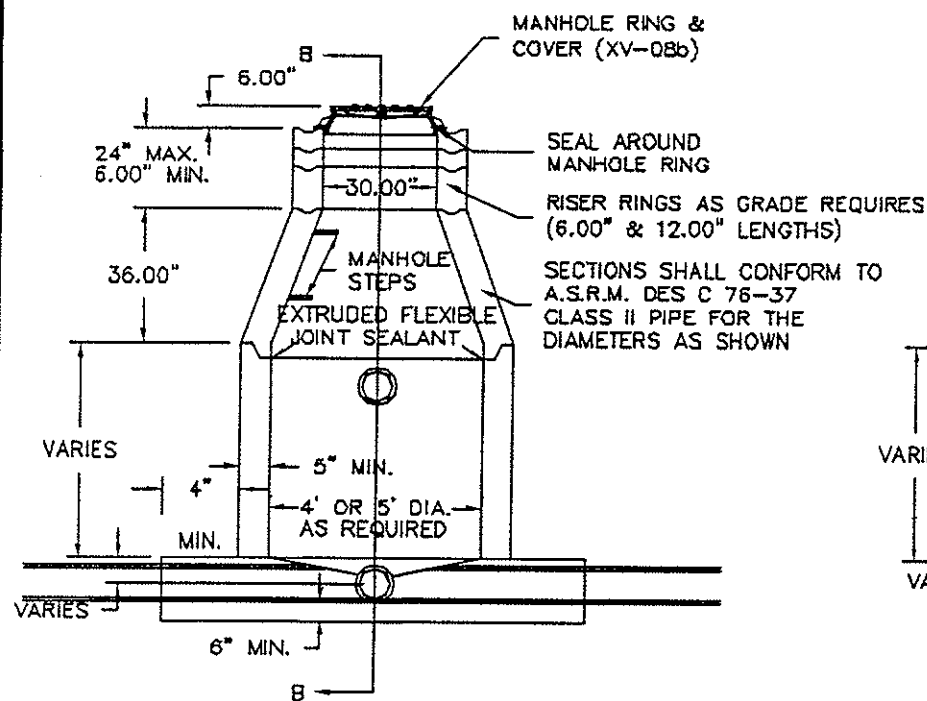

SECTION A-A

N.T.S.

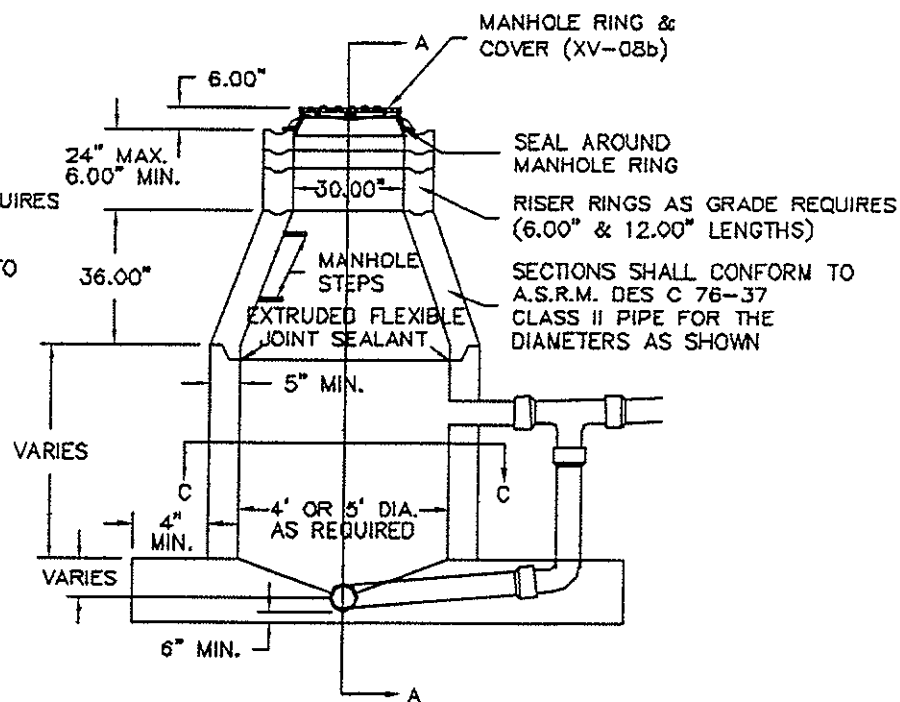


SECTION B-B

N.T.S.


PRECAST CONCRETE MANHOLE

(SHOWN W/DROP INLET)


NOTES:
VALVE BOXES & MANHOLES BEHIND
TOP BACK OF CURB SHALL BE SET
LEVEL WITH FINAL GRADE WITHOUT
CONCRETE.
ADJUST VALVE BOXES & MANHOLES TO
GRADE AFTER PAVING IS COMPLETED.
CUT OUT TOP 9", SET COVER TO GRADE
& BACKFILL W/CONCRETE. ASPHALT
SHALL BE CUT IN STRAIGHT UNIFORM LINES.

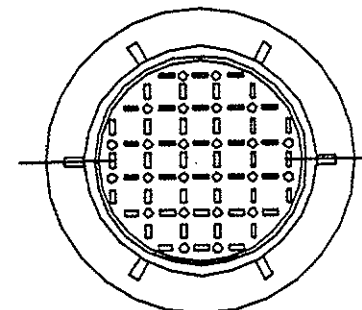

PLAN
N.T.S.

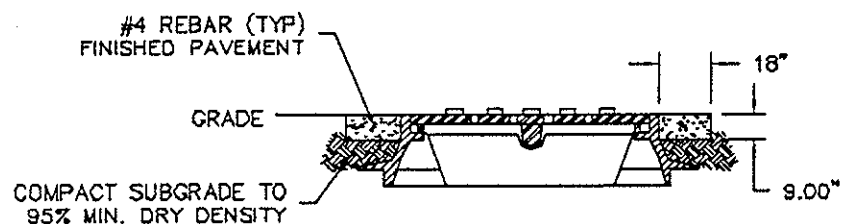

CROSS SECTION
N.T.S.

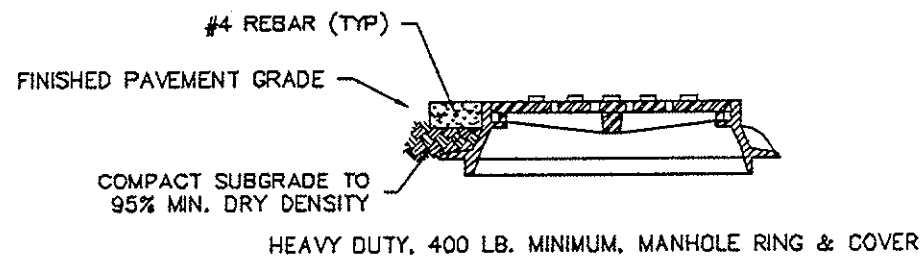

MANHOLE RING & COVER
N.T.S.